



# ARCO

## 4.5" B/W VIDEO DOOR PHONE



### DESCRIPTION

The ARCO 1715 video door phone, styled by the Finder Design Studio, can receive electronic calls using a speaker located under the handset and is compatible with all the other main Urmet video door phone systems.

Call volume is adjustable by means of a three-position potentiometer (mute - soft - loud). A red indication appears on the front of the video door phone when it is muted.

ARCO is provided with a key button (Ⓞ) and two supplementary service buttons (◇ and ○) for turning the staircase lights on, opening the secondary electric lock and for intercom calls.

ARCO is compact in size - 230 (h) x 206 (w) x 70 (d) mm handset side - 60 (d) mm monitor side - **and uses the same brackets as the Artico video door phone 1705.**

ARCO has a 4.5" B/W flat screen.

It is white with matte finish. The ARCO video door phone is suitable for use in different Urmet systems because it is provided with brackets for adapting the video door phone to the various systems.

The bracket is fixed to the wall by means of four bolts and has a removable terminal board for easy wire connection.

### 1715/1 - Arco video door phone

#### Specifications

- Power voltage: 16 ÷ 8.5 Vdc
- Working consumption: max 0.6 A
- Stand-by consumption: 0 A
- Working power: max 10 W
- Vertical frequency (CCIR version): 50 Hz ± 2 Hz
- Horizontal frequency (CCIR version): 15625 Hz ± 300 Hz
- Video signal: 1 Vpp 75 Ω nominal / 1 Vpp -6 dB minimum
- Kinescope: 4.5" flat
- Phosphorous: P45
- Screen size: 81 x 59 mm
- Vertical geometric distortion: 5% max
- Horizontal geometric distortion: 5% max
- Barrel geometric distortion: 10% max
- Brightness: 100cd/m<sup>2</sup> max setting
- Switch-on delay: 7 sec max
- Transmitting capsule: electret microphone
- Receiving capsule: speaker 45 Ω
- Button voltage: 24 Vrms max
- Button current: 1.2 Arms
- Working temperature range: -5° ÷ +50° C
- Max. humidity: 90% RH

 Door opening


 Staircase lights

 Secondary door opening

 Adjustable brightness

 Adjustable contrast


 Adjustable volume

 Arco is ready for operation with hearing aids capable of picking up the electromagnetic waves emitted by the apartment unit speaker.



# ARCO

## 4.5" B/W VIDEO DOOR PHONE

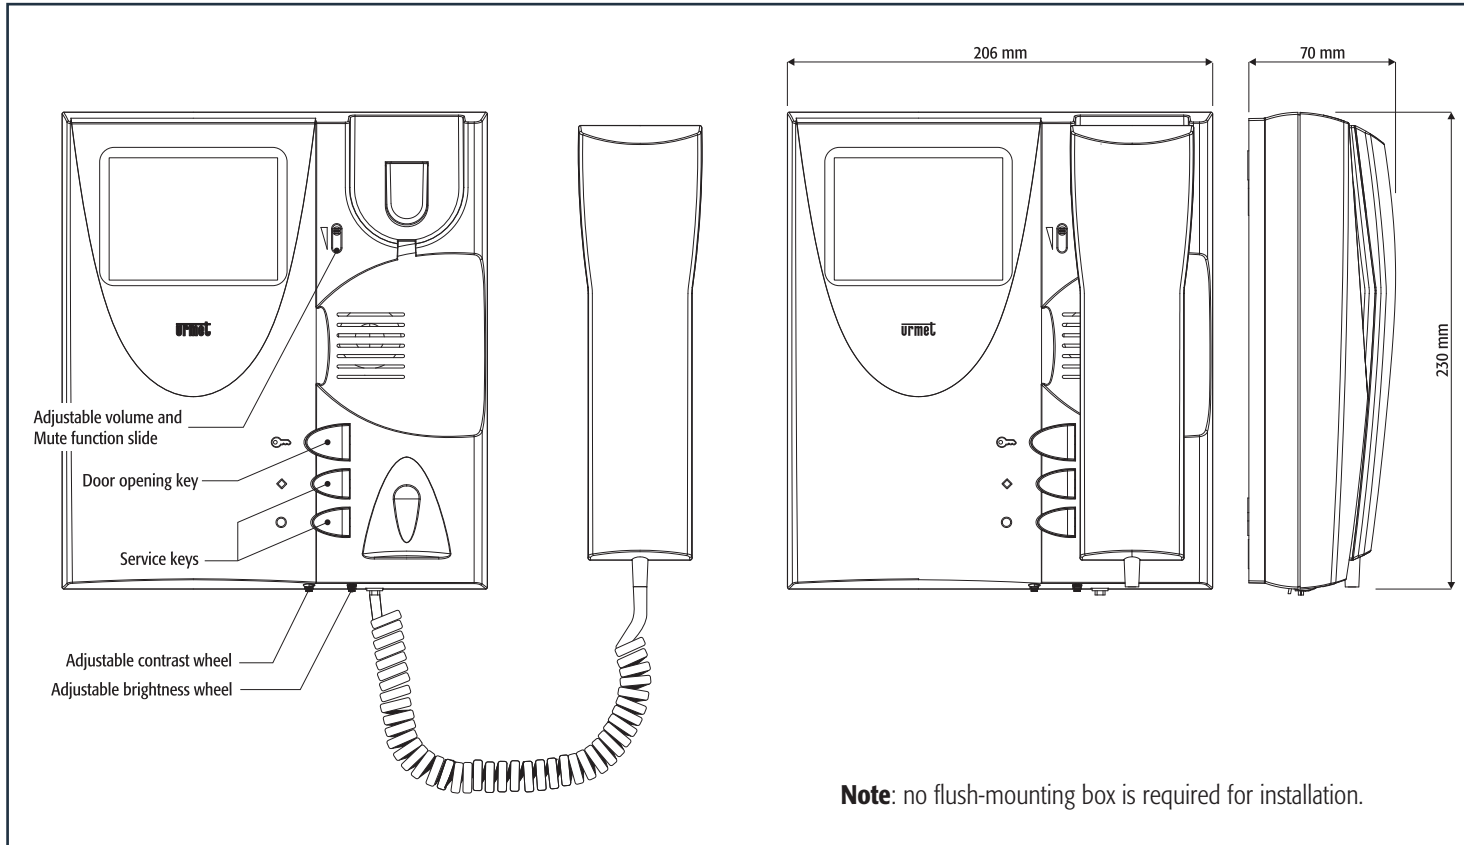

### Devices

- 1715/1 4.5" B/W video door phone
- 1715/17 4.5" B/W video door phone for hearing aids

### Accessories

- 1705/82 Bracket for 2GO! system
- 1705/90 Bracket for coax systems
- 1705/92 Bracket for Digivoice system
- 1705/954 Bracket for VOP system
- 1705/955 Bracket for 5-wire video system
- 1705/100 Plastic support for Sentry video door phone replacement
- 1132/54 Three-tone gong kit
- 9854/52 Supplementary electronic buzzer
- 9854/53 Floor call add-on device

### Spare parts

- 1715/101 Standard handset
- 1715/107 Handset with hearing aids capsule



IMPORTANT NOTE: Urmet Domus S.p.A. reserves the right to change the features of the illustrated products without prior notice. This publication is not contractually binding.